



"WE MAKE THE KITCHEN BETTER!"

ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois,
New Jersey, Ohio, Texas, Washington

Undercounter Refrigerators

Standard Features

- Stainless steel exterior & interior
- Field reversible door(s)
- Environmentally friendly R290 refrigerant
- Electronic temperature controller
- Maintains temperatures between 35°F – 38°F
- Self-closing door(s) with stay open feature
- Magnetic door gasket(s) standard for positive door seal
- Pre-installed casters
- One (1) pre-installed shelf per section

Optional Accessories

- Field installable drawer cartridges
- Extended warranty up to 5 years

For the best results of food preservation we recommend setting your refrigerator between 35 °F to 38 °F

1. Don't forget to leave the unit some room to breathe!
2. Please clean the condenser frequently to give the unit more fresh air.

MODELS:

**AUR24SD / AUR27SD / AUR36SD / AUR48SD
AUR60SD / AUR72SD**



AUR24SD



AUR27SD



AUR36SD



AUR48SD



AUR60SD



AUR72SD



**2 YEAR PARTS AND LABOR WARRANTY
5 YEAR COMPRESSOR PART WARRANTY**



REV. 08/25



"WE MAKE THE KITCHEN BETTER!"

ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com


www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois,
New Jersey, Ohio, Texas, Washington

SPECIFICATIONS

Models	Door	Capacity (Cu.Ft.)	Shelves	Casters (inch)	Rated Current (A)	Voltage (V/Hz/Ph)	HP	Refrigerant	Exterior Dimensions (inch)	Net Weight (lb)	Gross Weight (lb)
AUR24SD	1	3.7	2	2	2.4	115/60/1	1/7	R290	23 ^{7/8} ×26×32 ^{1/2}	108	138
AUR27SD	1	6.4	1	2	2.3	115/60/1	1/6	R290	27 ^{1/2} ×30×32 ^{1/2}	137	168
AUR36SD	2	8.6	2	2	2.3	115/60/1	1/6	R290	36 ^{3/8} ×30×32 ^{1/2}	161	198
AUR48SD	2	11.8	2	2	2.3	115/60/1	1/6	R290	48 ^{1/4} ×30×32 ^{1/2}	182	249
AUR60SD	2	15	2	2	2.8	115/60/1	1/5	R290	60 ^{1/4} ×30×32 ^{1/2}	218	287
AUR72SD	3	18.2	3	2	2.8	115/60/1	1/5	R290	72 ^{5/8} ×30×32 ^{1/2}	254	335

PLAN VIEW

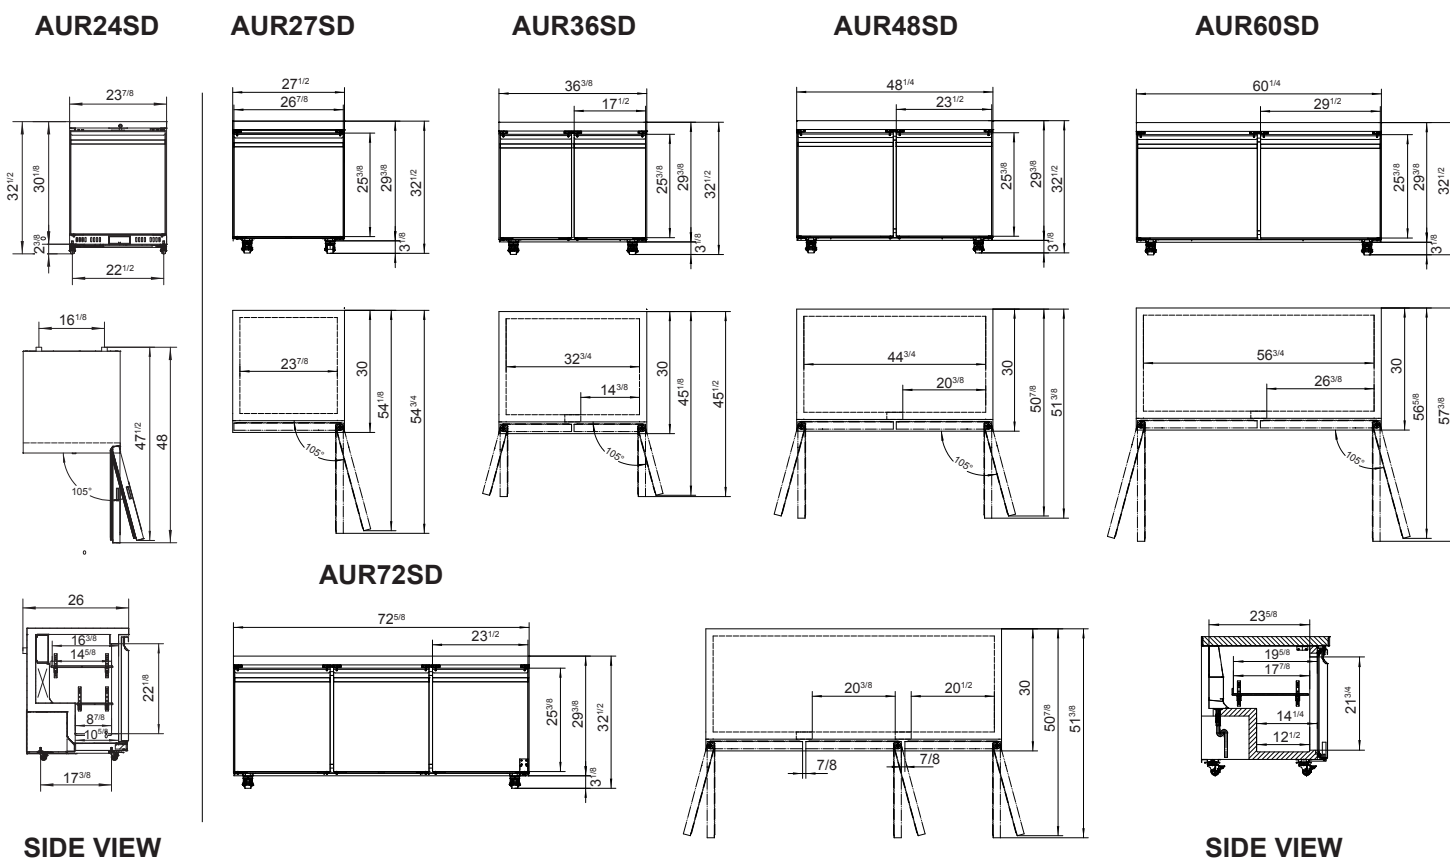

Casters

Epoxy shelves

Rear grate

Temperature control





"WE MAKE THE KITCHEN BETTER!"

ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois,
New Jersey, Ohio, Texas, Washington

Undercounter Refrigerators with Drawers

Standard Features

- Stainless steel exterior & interior with reinforced stainless steel top
- Environmentally friendly R290 refrigerant
- Electronic temperature controller
- Maintains temperatures between 35°F – 38°F
- Recessed door handle(s)
- Magnetic drawer gasket(s)
- Each unit comes standard with 1/6 size pans
- Standard pre-installed 2" heavy duty swivel plate casters:
B0604434 (with brake) & B0604433 (no brake)

Optional Accessories

- Extended warranty up to 5 years
- 1.2" & 1.5" Low profile swivel plate casters available
- 4" & 5" Swivel stem casters available

Caster Part Number (with brake)	Caster Part Number (no brake)	Description	Unit Overall Height (in)
R06001000228	R06001000229	1.2" swivel plate casters	31 ^{1/4}
R06001000063	N/A	1.5" swivel plate caster	31 ^{7/8}
B0604434	B0604433	2" heavy duty swivel plate casters	32 ^{3/8}
B0604421	B0604413	4" swivel stem casters	34 ^{3/8}
B0604007	B0604006	5" swivel stem casters	35 ^{1/4}

For the best results of food preservation we recommend setting your refrigerator between 35 °F to 38 °F

1. Don't forget to leave the unit some room to breathe!
2. Please clean the condenser frequently to give the unit more fresh air.

MODELS:

AUR27D2 / AUR36D2 / AUR48D4 / AUR60D4 / AUR72D6



AUR27D2



AUR36D2



AUR48D4



AUR60D4



AUR72D6



3 YEAR PARTS AND LABOR WARRANTY
5 YEAR COMPRESSOR PART WARRANTY



REV. 07/26



"WE MAKE THE KITCHEN BETTER!"

ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com


California, Colorado, Florida, Georgia, Illinois,
New Jersey, Ohio, Texas, Washington

SPECIFICATIONS


Models	Drawers	Capacity (Cu.Ft.)	Casters (inch)	Rated Current (A)	Voltage (V/Hz/Ph)	HP	Refrigerant	Exterior Dimensions (inch)	Net Weight (lb)	Gross Weight (lb)
AUR27D2	2	6.5	2	3.4	115/60/1	1/6	R290	27 ^{1/2} ×30×32 ^{3/8}	178	233
AUR36D2	2	9	2	3.4	115/60/1	1/6	R290	36 ^{3/8} ×30×32 ^{3/8}	207	271
AUR48D4	4	12.2	2	3.4	115/60/1	1/6	R290	48 ^{1/4} ×30×32 ^{3/8}	271	348
AUR60D4	4	15.5	2	3.9	115/60/1	1/5+	R290	60 ^{1/4} ×30×32 ^{3/8}	319	394
AUR72D6	6	18.9	2	3.9	115/60/1	1/5+	R290	72 ^{5/8} ×30×32 ^{3/8}	334	433

PLAN VIEW


AUR27D2

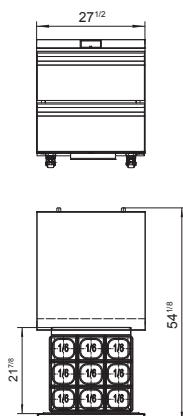


AUR36D2

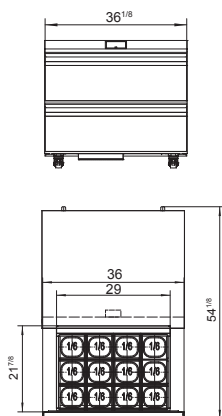



AUR48D4

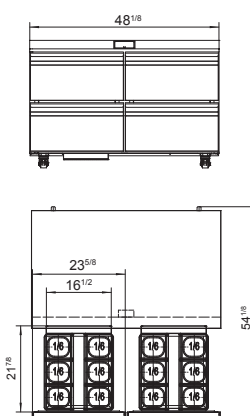

AUR60D4

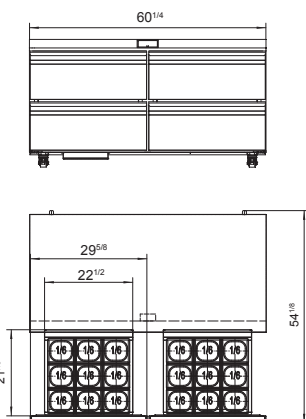

AUR72D6

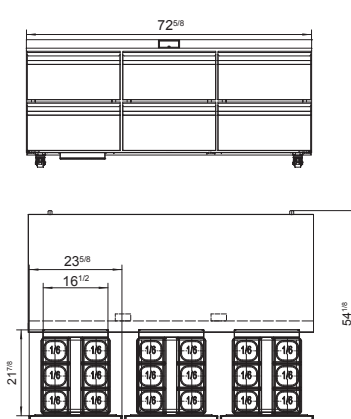

Interior Dimensions

For detailed pan configuration, please refer to the next page.

Casters




Rear grate



Temperature control



NEMA 5-15P



NEMA
15A/125V



"WE MAKE THE KITCHEN BETTER!"

ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois,
New Jersey, Ohio, Texas, Washington

PAN CONFIGURATION

Standard Configuration

	AUR27	AUR36	AUR48	AUR60	AUR72
Top Drawer					
Bottom Drawer					

Optional Configuration

	AUR27	AUR36	AUR48	AUR60	AUR72
Top Drawer					
Bottom Drawer					
Top Drawer					
Bottom Drawer					