



**"WE MAKE THE KITCHEN BETTER!"**

**ATOSA USA, INC.**

**Toll Free: 855-855-0399 Email: [info@atosausa.com](mailto:info@atosausa.com)**

[www.atosa.com](http://www.atosa.com) | [www.atosausa.com](http://www.atosausa.com)

California, Colorado, Florida, Georgia, Illinois,  
New Jersey, Ohio, Texas, Washington

# Back Bar Coolers

## MODELS:

**MBB23GR / MBB48GR / MBB59GR / MBB69GR /  
MBB90GR**

## Standard Features

- Stainless steel exterior & interior
- Electronic Temperature Controller
- Maintains temperatures between 35°F – 38°F
- Heavy duty Embraco compressor with environmentally friendly R290 refrigerant
- Slide out compressor assembly for easy maintenance
- Recessed door handle(s)
- Interior light(s)
- Magnetic door gasket(s) standard for positive door seal
- Door lock(s) standard
- Pre-installed epoxy coated shelves
- Pre-installed casters



**MBB23GR**



**MBB48GR**



**MBB59GR**



**MBB90GR**



**MBB69GR**

For the best results of food preservation we recommend setting your refrigerator between 35 °F to 38 °F

1. Don't forget to leave the unit some room to breathe!
2. Please clean the condenser frequently to give the unit more fresh air.



**2 YEAR PARTS AND LABOR WARRANTY  
5 YEAR COMPRESSOR PART WARRANTY**



REV. 10/24



**"WE MAKE THE KITCHEN BETTER!"**

**ATOSA USA, INC.**

**Toll Free: 855-855-0399 Email: [info@atosausa.com](mailto:info@atosausa.com)**

[www.atosa.com](http://www.atosa.com) | [www.atosausa.com](http://www.atosausa.com)


California, Colorado, Florida, Georgia, Illinois,

New Jersey, Ohio, Texas, Washington

## SPECIFICATIONS

| Models  | Door | Capacity (Cu.Ft.) | Shelves | Casters (inch) | Rated Current (A) | Voltage (V/Hz/Ph) | HP  | Refrigerant | Exterior Dimensions (inch)                                | Net Weight (lb) | Gross Weight (lb) |
|---------|------|-------------------|---------|----------------|-------------------|-------------------|-----|-------------|-----------------------------------------------------------|-----------------|-------------------|
| MBB23GR | 1    | 8.2               | 2       | 3.5            | 2.3               | 115/60/1          | 1/7 | R290        | 23×29 <sup>1/2</sup> ×38 <sup>4/5</sup>                   | 170             | 207               |
| MBB48GR | 2    | 13.4              | 4       | 2.5            | 2.3               | 115/60/1          | 1/7 | R290        | 48×28 <sup>1/10</sup> ×40 <sup>1/8</sup>                  | 192             | 240               |
| MBB59GR | 2    | 17.3              | 4       | 2.5            | 2.3               | 115/60/1          | 1/6 | R290        | 57 <sup>4/5</sup> ×28 <sup>1/10</sup> ×40 <sup>1/8</sup>  | 214             | 262               |
| MBB69GR | 2    | 21.5              | 4       | 2.5            | 2.3               | 115/60/1          | 1/6 | R290        | 68×28 <sup>1/10</sup> ×40 <sup>1/8</sup>                  | 238             | 295               |
| MBB90GR | 3    | 30.1              | 6       | 2.5            | 2.8               | 115/60/1          | 1/6 | R290        | 89 <sup>3/10</sup> ×28 <sup>1/10</sup> ×40 <sup>1/8</sup> | 295             | 370               |

## PLAN VIEW

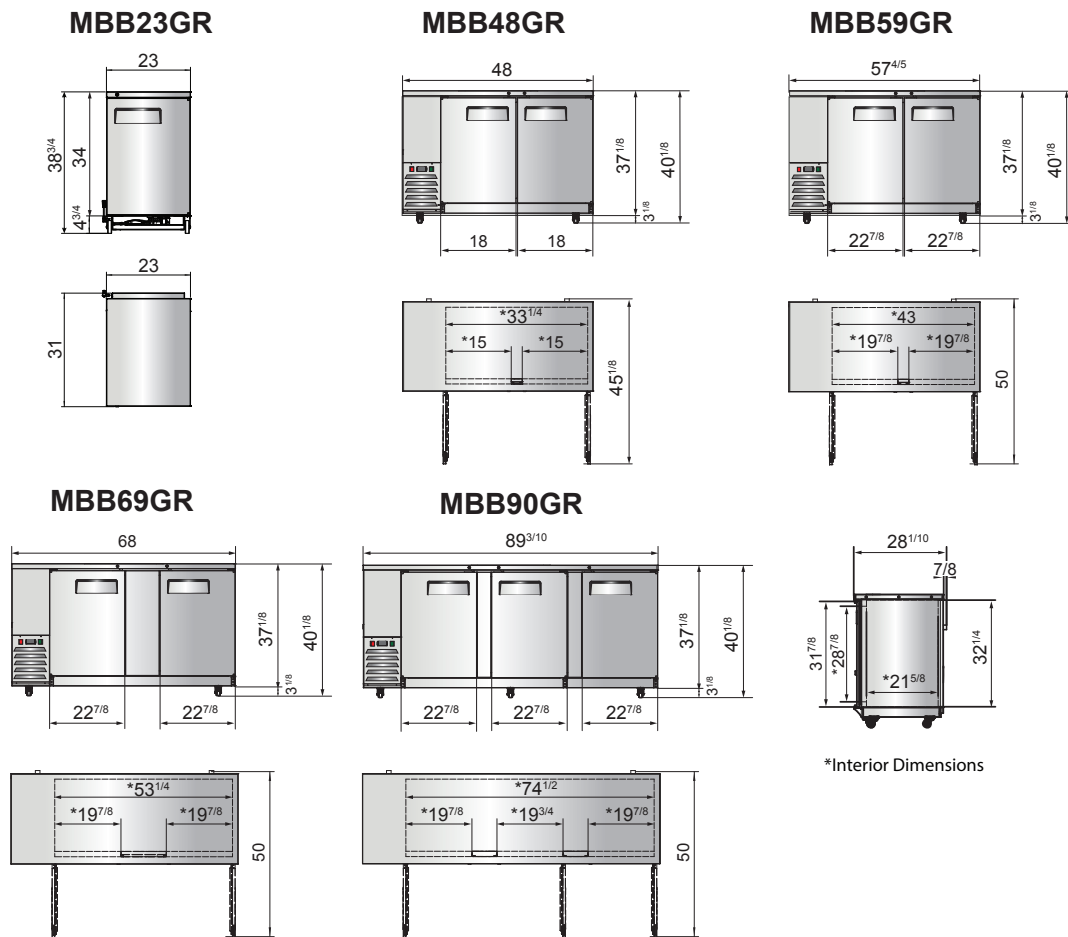

Epoxy shelves

Door lock

Temperature control

Recessed handles



**NEMA 5-15P**



NEMA  
15A/125V



**"WE MAKE THE KITCHEN BETTER!"**

**ATOSA USA, INC.**

**Toll Free: 855-855-0399 Email: [info@atosausa.com](mailto:info@atosausa.com)**

[www.atosa.com](http://www.atosa.com) | [www.atosausa.com](http://www.atosausa.com)

California, Colorado, Florida, Georgia, Illinois,  
New Jersey, Ohio, Texas, Washington

# Back Bar Coolers With Glass Doors

## Standard Features

- Stainless steel exterior & interior
- Electronic Temperature Controller
- Maintains temperatures between 35°F – 38°F
- Heavy duty Embraco compressor with environmentally friendly R290 refrigerant
- Slide out compressor assembly for easy maintenance
- LED Interior light(s)
- Magnetic door gasket(s) standard for positive door seal
- Door lock(s) standard
- Pre-installed epoxy coated shelves
- Pre-installed casters

## MODELS:

**MBB23GGR / MBB48GGR / MBB59GGR  
MBB69GGR / MBB90GGR**



**MBB23GGR**



**MBB48GGR**



**MBB59GGR**



**MBB90GGR**



**MBB69GGR**

For the best results of food preservation we recommend setting your refrigerator between 35°F to 38 °F

1. Don't forget to leave the unit some room to breathe!
2. Please clean the condenser frequently to give the unit more fresh air.



**2 YEAR PARTS AND LABOR WARRANTY  
5 YEAR COMPRESSOR PART WARRANTY**



REV. 12/24



**"WE MAKE THE KITCHEN BETTER!"**

**ATOSA USA, INC.**

**Toll Free: 855-855-0399 Email: info@atosausa.com**

www.atosa.com | www.atosausa.com




California, Colorado, Florida, Georgia, Illinois,  
New Jersey, Ohio, Texas, Washington

## SPECIFICATIONS

| Models   | Door | Capacity (Cu.Ft.) | Shelves | Casters (inch) | Rated Current (A) | Voltage (V/Hz/Ph) | HP  | Refrigerant | Exterior Dimensions (inch)                                | Net Weight (lb) | Gross Weight (lb) |
|----------|------|-------------------|---------|----------------|-------------------|-------------------|-----|-------------|-----------------------------------------------------------|-----------------|-------------------|
| MBB23GGR | 1    | 8.2               | 2       | 3.5            | 2.3               | 115/60/1          | 1/7 | R290        | 23×31 <sup>1/8</sup> ×38 <sup>3/4</sup>                   | 170             | 207               |
| MBB48GGR | 2    | 12.9              | 4       | 2              | 2.3               | 115/60/1          | 1/7 | R290        | 48×28 <sup>1/10</sup> ×40 <sup>1/8</sup>                  | 214             | 262               |
| MBB59GGR | 2    | 17.3              | 4       | 2              | 2.3               | 115/60/1          | 1/7 | R290        | 57 <sup>4/5</sup> ×28 <sup>1/10</sup> ×40 <sup>1/8</sup>  | 236             | 284               |
| MBB69GGR | 2    | 21.5              | 4       | 2              | 2.3               | 115/60/1          | 1/7 | R290        | 68×28 <sup>1/10</sup> ×40 <sup>1/8</sup>                  | 260             | 317               |
| MBB90GGR | 3    | 30.1              | 6       | 2              | 2.8               | 115/60/1          | 1/5 | R290        | 89 <sup>3/10</sup> ×28 <sup>1/10</sup> ×40 <sup>1/8</sup> | 317             | 392               |



## PLAN VIEW

**MBB23GGR**





\*Interior Dimensions



**MBB48GGR**






**MBB59GGR**



**MBB69GGR**




**MBB90GGR**

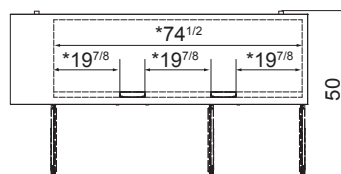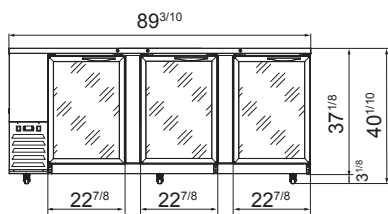

\*Interior Dimensions

**Epoxy shelves**



**Door lock**



**Temperature control**



**NEMA 5-15P**



NEMA  
15A/125V